



Kitchen Leash®

Manufactured By APC GROUP, INC.

The Kitchen Leash is designed specifically for areas subjected to steam and/or moisture and rated 240°F. The Kitchen Leash provides watertight retractable power which can be made available to kitchens and food prep areas without concern of hazardous power cords on the floor. Our kitchen cord reels are ideal for commercial kitchens and restaurants, and are available with black or stainless-steel finish.

In food preparation areas where cleanliness and safety are a requirement; the Kitchen Leash is a must. The Kitchen Leash allows food preparation and cleanup crews to avoid power cables typically found on the floor. When mounted overhead the Kitchen Leash avoids water, steam, grease and food prep waste contamination.



BENEFITS OF THE KITCHEN LEASH

USED IN MANY DIFFERENT ENVIRONMENTS

- Reduces "trip and fall claims"
- Increases employee productivity
- Provides for a safe working environment
- Simplifies food prep area cleanup
- Provides electrical power to where it's needed
- Retracts out of the way when not in use
- can be ceiling, wall, or cart-mounted



PRODUCT SPECIFICATIONS

CASE (HOUSING)

Dimensions – 9" x 12" x 3"
Molded Polypropylene
3.175mm Thickness
94V-0 Flammability
Rating

POWER CORD

Gauge/Conductor: 14/3
Type: SJTOW 12/3 AWG
Length: 10', 20', 15' (12/3) and *30'
Rating: -57°F to 200°F

KITCHEN LEASH USES

FOOD PREPARATION AREAS INCLUDES:

- Restaurants
- Commissary
- School Cafeterias
- Food Processing Plants
- Cafeterias
- Culinary Schools

PRODUCT TESTING & FEATURES

CONFORMS TO UL LISTINGS

1363A, UL Std. 355, Certified to
CSA C22.2 Std No. 308
Hose Down - CSA 6.8.2
Strain Relief - CSA 6.4
Flame Retardant - UL 94-94V-0



**CONFORMS TO UL LISTINGS 1363-A, 60601, 355,
CSA C22.2 std. No. 308**

*30ft length only available for the M and AD models

PRODUCT SPECIFICATIONS

RECEPTACLE/PLUG

Rated-125VAC
NEMA 5-15P or 5-20P
Dual Duplex Receptacles
NEMA 5-15R OR 5-20R

CIRCUIT BREAKER

20 AMP

BUILT TO WITHSTAND HARSH CONDITIONS

Internal Circuit Breaker
Oil/Grease & Water Resistant
Withstand Temp. Up to 240°F
Retractable Cord with
Adjustable Ball Stop

ETL Tested
Indoor Rated
Water-tight Case


MOUNTING BRACKETS

KLCB Ceiling Or Wall Mounting Bracket



Used to mount model KL-202014-D, KL-102014-D and, KL-152012-D.

KLCP Acoustic Ceiling Plate: Used For Drop Ceiling Installations

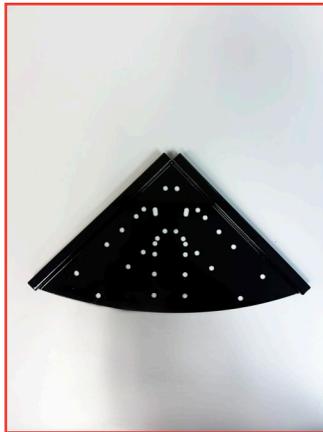


Used to mount above tiles for model KL-202014-D, KL-102014-D and KL-152012-D.

KLMP Wall, Pole, Or Mobile Equipment Such As A Cart



Used to mount model KL-202014-D, KL-102014-D and, KL-152012-D.

CORD REEL SPECIFICATIONS

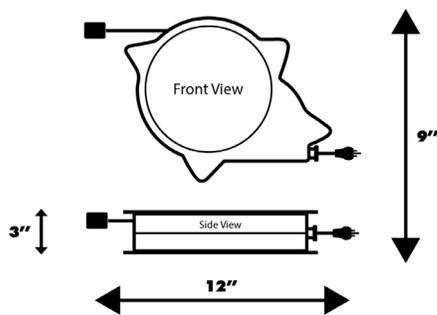

Dimensions – 9" x 12" x 3"
Molded Polypropylene
3.175 mm Thickness
94V-0 Flammability
Rating

Samples are available upon request for evaluations at no charge.



CORD REEL DIMENSIONS

Unit Type	Model Number	Length	Breaker Amp	Gauge	Retractable End	Non-Retracting End	Ship Weight
 <p>Mounting brackets sold separately</p>	KL102014-D	10	20	14/3	Female	Male	10lbs.
	KL202014-D	20	20	14/3	Female	Male	11lbs.
	KL152012-D	15	20	12/3	Female	Male	12lbs.

Brackets	Model #		Shipping Weight
	KLCB	Kitchen Leash ceiling bracket	2lbs.
	KLMP	Kitchen Leash Mounting Plate	2lbs.
	KLCP	Kitchen Leash ceiling plate. Mounts above drop ceiling, two support KLCB bracket.	2lbs.

APC GROUP INC.
219 S. William Dillard
Building. 4
Gilbert AZ 85233



Visit kitchenleash.com
for additional information